

## CABLE MANAGEMENT PRODUCTS

### HEATSHRINK TUBING General Purpose

Part No.	Size I.D. Expanded mm	Size I.D. Recovered mm	Part No.	Size I.D. Expanded mm	Size I.D. Recovered mm
40370	1.5	0.75	40378	13.0	6.50
40371	2.5	1.25	40379	20.0	10.00
40372	3.5	1.75	40380	25.0	12.50
40373	4.0	2.00	40381	38.0	19.00
40374	5.0	2.50	40382	50.0	25.00
40375	7.0	3.50	40383	70.0	38.00
40376	8.0	4.00	40384	100.0	50.00
40377	10.0	5.00			

AVAILABLE COLOURS : Black, Red, White, Blue, Clear.  
(Others available to order)


SHRINK RATIO : 2-1 ( 50% )

SHRINK TEMPERATURE : >90°C

OPERATING TEMPERATURE : -55° to +125°C

OPERATING VOLTAGE : 600 Volts Max.

FLAMABILITY : Self Extinguishing VW1

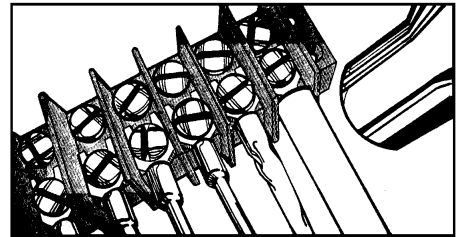

### DUAL WALL Adhesive Lined

Part No.	Size I.D. Expanded mm	Size I.D. Recovered mm
40351	3	1
40352	4.8	1.6
40353	6	2
40354	9	3
40355	12	4
40356	18	6
40357	24	8
40358	39	13



AVAILABLE COLOURS : Black

SHRINK RATIO : 3-1 ( 66% )

SHRINK TEMPERATURE : >110°C

OPERATING TEMPERATURE : -55° to +85°C

OPERATING VOLTAGE : 15KV/mm