



Consult Heyco  
for Colors  
Other Than Black




# Heyco® Louvered Plugs

PANEL DIMENSIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Maximum Thickness		Mounting Hole Diameter		Black	White		A Head Diameter		B Overall Height	
in.	mm.	in.	mm.				in.	mm.	in.	mm.
.125	3,2	.875	22,2	<b>2557</b>	<b>2558</b>	LP 875	1.015	25,8	.531	13,5
.125	3,2	1.000	25,4	<b>2559</b>	<b>2560</b>	LP 1000	1.203	30,6	.531	13,5
.125	3,2	1.093	27,8	<b>2561</b>	<b>2562</b>	LP1093	1.218	30,9	.531	13,5
.125	3,2	1.125	28,6							
.125	3,2	1.375	34,9	<b>2567</b>	<b>2568</b>	LP 1375	1.500	38,1	.543	13,8
.125	3,2	1.500	38,1	<b>2569</b>	<b>2570</b>	LP 1500	1.671	42,4	.543	13,8
.125	3,2	2.000	50,8	<b>2594</b>	<b>2595</b>	LP 2000	2.170	55,1	.543	13,8
.250	6,4	2.500	63,5	<b>2596</b>	<b>2597</b>	LP 2.5	2.718	69,0	.823	20,9
.250	6,4	3.000	76,2	<b>2598</b>	<b>2599</b>	LP 3.0	3.171	80,5	.823	20,9

Standard Color: Black. Other colors available at extra charge with quantity minimums.  
Locking fingers in fractional increments up to the maximum panel thickness.

- Louvers permit the passage of air for ventilation but limits liquid infiltration.
- Locks firmly into panel up to .250" (6,4 mm) thick.
- Quick and easy installation.
- Suitable for ventilation in electronic enclosures, motor housings and metal or plastic panels.
- Withstands a push back force of 35 lbs.

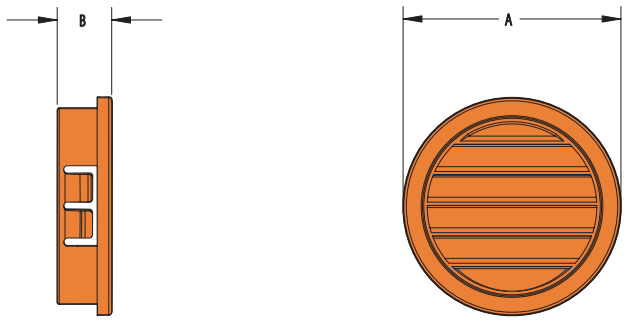

Material	6/6 Nylon
Certifications	UL Pending
Flammability Rating	94V-2
Material Temperature Index	257°F (125°C)–Maximum temperature on part not to exceed 221°F (105°C)

Quick Specs