



TERMINAL BLOCKS

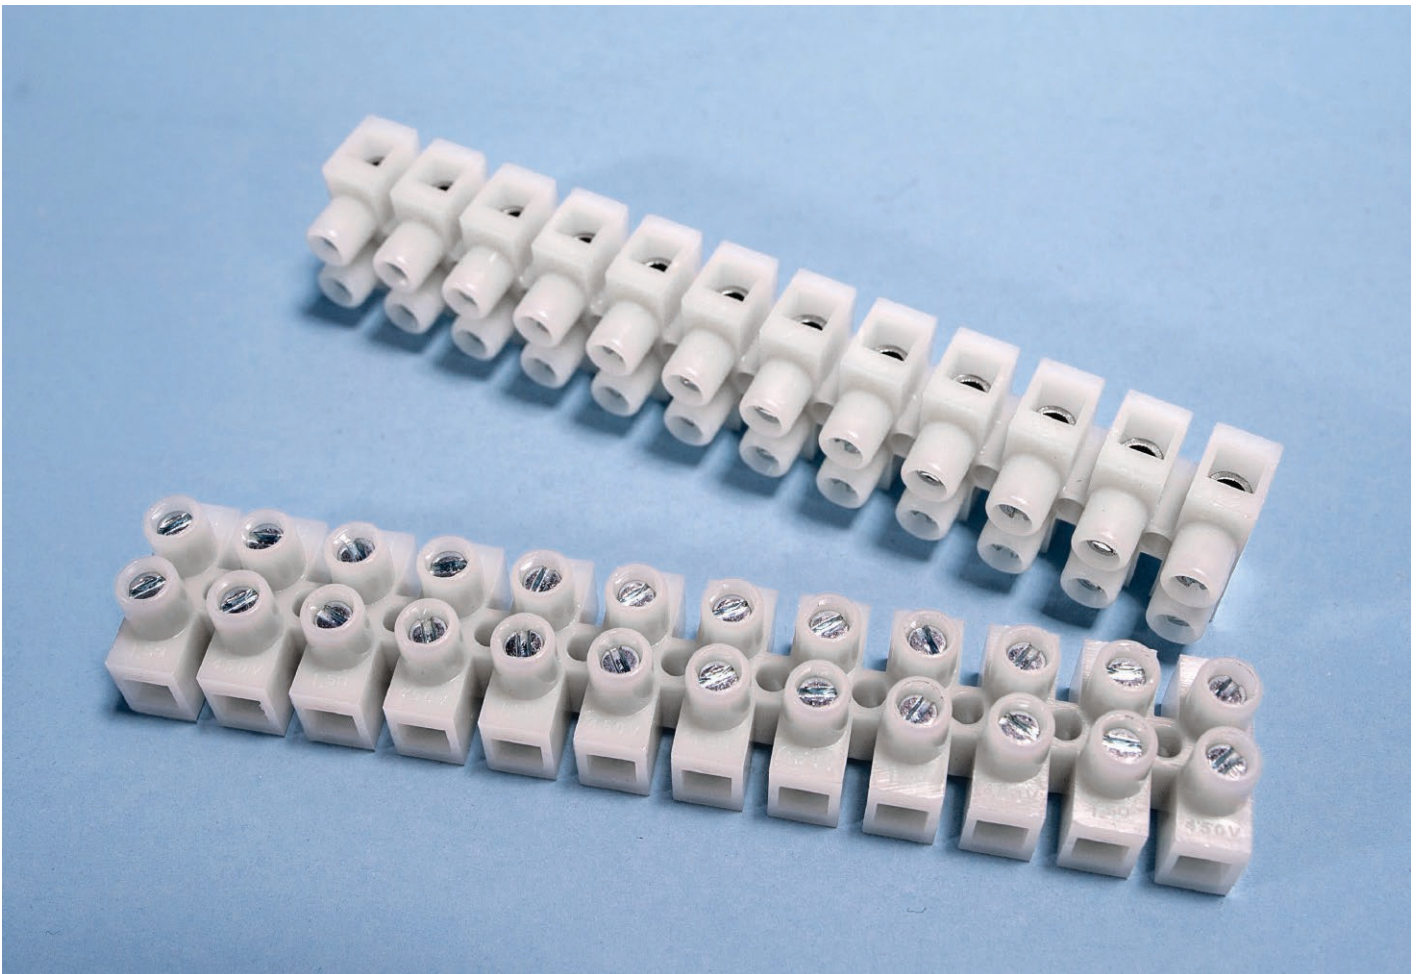

FEATURES:

Available with wire protection.
 Extensive certification in 13 countries*.
 Recessed screws and tubular contacts provide added safety and help prevent short circuits.
 12 poles, can be cut into desired poles.
 For use in electrical appliances, lighting and building wiring, especially in OEM & Industry applications.




QUICK SPECS

Housing: Polyamide 66, flame-retardant to UL 94V-2
 Working Temp: -25°C to 105°C
 Terminal Body: Brass alloy, nickel-plated
 Wire Protector: **Stainless spring steel**
 Screw: Steel, zinc-plated



* Not all terminals are certified in all 13 countries. Please see the detailed specifications for more information.

PTO for detailed specifications.

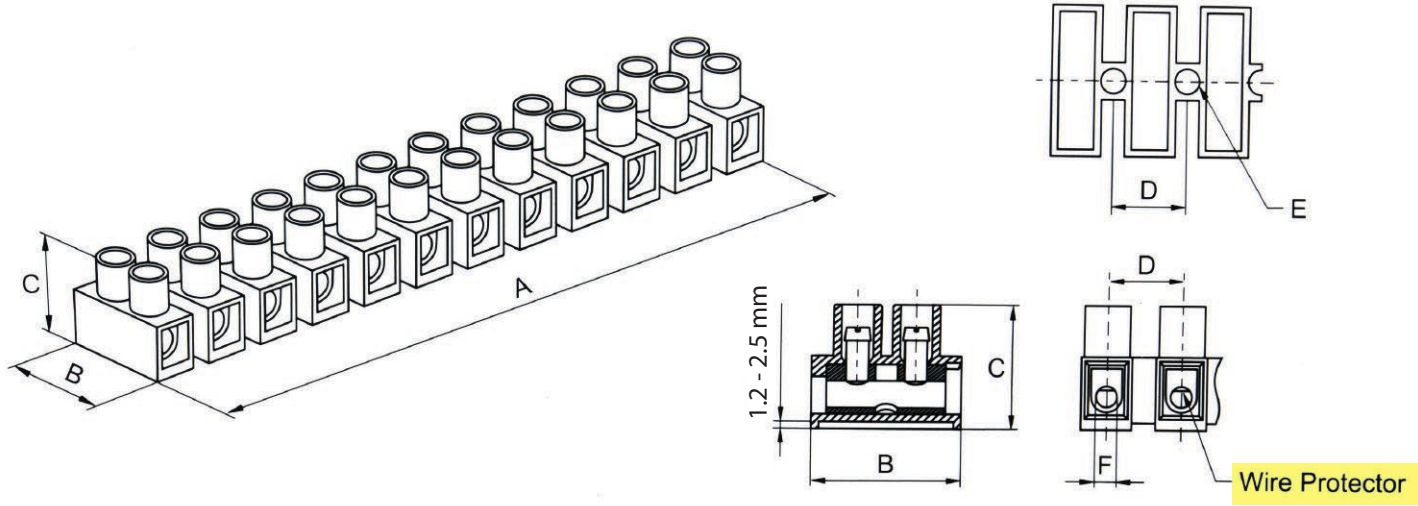

PART#	WIRE RANGE	ELECTRICAL RATING	CERT*	RAISED BASE (mm)	SCREW	WIRE PROTECT	DIMENSIONS (mm)					
							A	B	C	D	E	F
31610	0.75 - 1.5 mm ² 22-12 AWG, Cu	17.5 A, 450 V 20 A, 300 V	β	1.2	M2.6x5	Without	96.20	17.00	14.50	8.00	2.90	2.8±0.1
31611	0.75 - 1.5 mm ² 22-12 AWG, Cu	17.5 A, 450 V 20 A, 300 V	β	1.2	M2.6x5	With	96.20	17.00	14.5	8.00	2.90	2.8±0.1
31612	1 - 2.5 mm ² 22-10 AWG, Sol Cu 14-10 AWG, Str Cu	24 A, 450 V 30 A, 300 V	β	1.2	M3.0x6	Without	117.50	20.20	17.00	10.00	3.60	3.4±0.1
31613	1 - 2.5 mm ² 22-10 AWG, Sol Cu 22-12 AWG, Str Cu	24 A, 450 V 30 A, 300 V	β	1.2	M3.0x6	With	117.50	20.20	17.00	10.00	3.60	3.4±0.1
31614	2.5 - 6 mm ² 22 - 10 AWG, Cu	41 A, 500 V, to 35 A, 300 V	ψ	1.2	M3.5x7	Without	140.7	23.80	19.00	12.00	3.90	4.2±0.1
31615	2.5 - 6 mm ² 22 - 10 AWG, Cu	41 A, 500 V to 35 A, 300 V	ψ	1.2	M3.5x7	With	140.7	23.80	19.00	12.00	3.90	4.2±0.1
31616	4 - 10 mm ² 20 - 8 AWG, Cu	57 A, 500 V to 50 A, 300 V	ψ	2.5	M4.0x9	Without	158.0	25.60	25.20	13.50	4.40	5.0±0.1
31617	4 - 10 mm ² 20 - 8 AWG, Cu	57 A, 500 V to 50 A, 300 V	ψ	2.5	M3.0x6	With	158.0	25.60	25.20	13.50	4.40	5.0±0.1

*CERTIFICATES												
β												
ψ												