


Heyco® NyTye® Push Rivets



- Nytye Push Rivets provide the installer an ability to remove the Rivet and release the wire tie bundle.
- Nytye Push Rivets are reusable.

PART #		TENSILE STRENGTH (N)	MAX. BUNDLE DIA. (MM)	A LENGTH (MM)	B WIDTH (MM)	ASSEMBLED PANEL THICKNESS		MOUNTING HOLE DIA. (MM)
NYTYE	PUSH RIVET					MIN. (MM)	MAX. (MM)	
NYTYE FIXED RIVET								
13430B*	NA	392	43.0	169.0	9.0	1.0	2.0	6.5
NYTYE PUSH RIVET								
13431B**	9058	392	43.0	169.0	9.0	0.8	1.8	4.1
	9060					1.8	2.8	
	9062					2.8	3.8	
	9064					3.8	4.8	
	9066					4.8	5.8	
	9068					5.8	6.8	
	9318					7.3	8.8	
13432B**	9072	392	43.0	169.0	9.0	0.8	1.8	5.1
	9074					1.8	2.8	
	9076					2.8	3.8	
	9078					3.8	4.8	
	9080					4.8	5.8	
	9082					5.8	6.8	

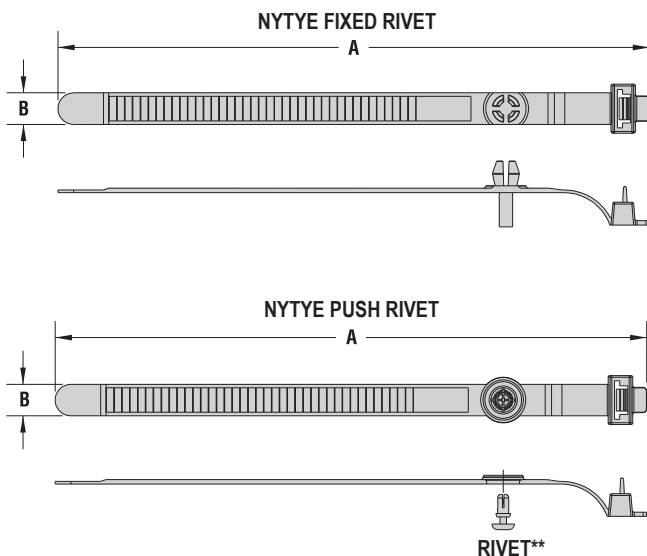

- * Rivet is integrated to wire tie.
- ** Rivets are sold separately.

QuickSpecs

Material	UL 94 V-2 PA 66
Temperature Range	0°C to 85°C