


Liquid Tight Break-Thru Plugs

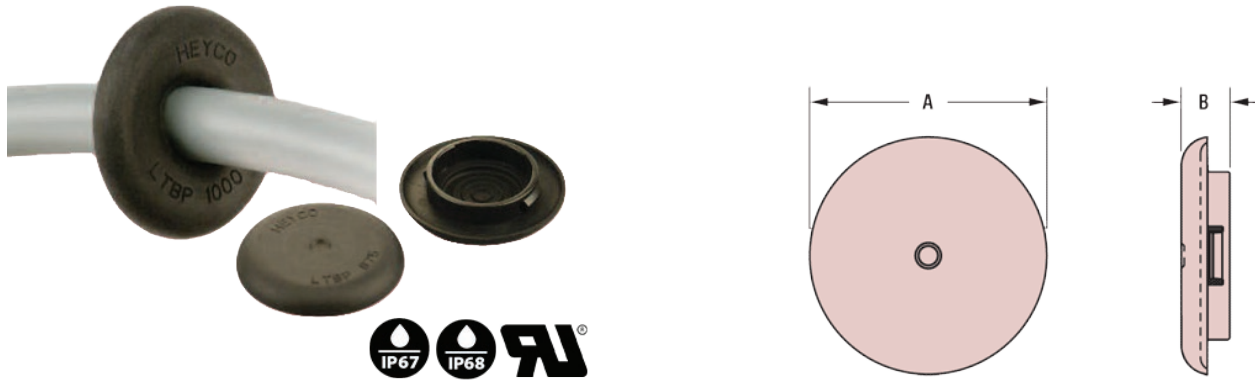

- These co-molded nylon and elastomer parts function as Liquid Tight Plugs with an IP 67/68 rating, yet can be pierced by round wire, cable or tubing to function as Liquid Tight Bushings with the same resulting IP 67/68 rating.
- Certified by UL under UL 635
- For use in panels as thin as 0.5 mm and as thick as 6.4 mm.
- Provide liquid tight closure when used as a plug. When pierced, function as a liquid tight bushing that convert raw edged holes to smooth, neat, insulated holes.
- Used as a liquid tight bushing, HEYCo-molded Liquid Tight Break-Thru Plugs insulate and mechanically protect electrical and telecommunications cable, tubing, hose, rope, and utility lines.
- Locking fingers snap into holes with fingertip pressure.
- Locking fingers in fractional increments up to the maximum panel thickness.
- Available in multiple sizes for use in 12.7 mm 38.1 mm diameter holes.

PANEL DIMENSIONS		CABLE DIA. RANGE (mm)	PART NO. (Black)	PART DIMENSIONS	
Thickness at Locking Finger Steps (mm)	Mounting Hole Diameter* (mm).			A Head Diameter (mm)	B Overall Height (mm)
With Five Locking Finger Steps — For Panels up to 1.6 mm Thick					
0.5 0.8 1.0 1.2 1.6	12.7	2.0 - 5.1	C2008	23.4	8.1
	15.9	3.3 - 9.5	C2012	26.2	
	19.1	4.4 - 10.2	C2016	29.2	
	22.2	3.3 - 11.4	C2020	32.5	
	25.4	5.1 - 18.2	C2022	36.3	
	27.8	6.4 - 19.4	C2024	38.9	
With Seven Locking Finger Steps — For Panels from 1.6 mm to 6.4 mm Thick					
1.6 2.0 2.4 3.2 4.0 5.1 6.4	12.7	2.0 - 5.1	C2058	23.4	15.9
	15.9	3.3 - 9.5	C2062	26.2	
	19.1	4.4 - 10.2	C2066	29.2	
	22.2	3.3 - 11.4	C2070	32.5	
	25.4	5.1 - 18.2	C2072	36.3	
	27.8	6.4 - 19.4	C2074	38.9	
	34.9	7.6 - 24.1	C2080	45.7	
	38.1	9.5 - 26.9	C2082	49.0	17.0