


Cable Gland - Standard - Cylindrical - PG Thread - Crude BRASS

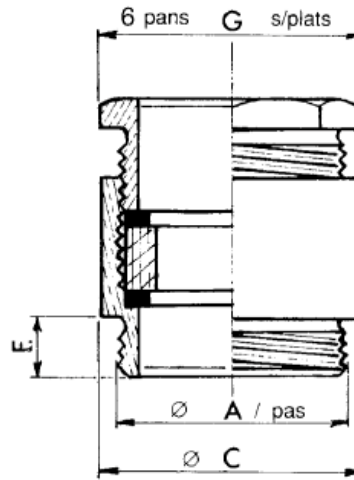

Part No.	Identification	Thread	Min. Cable Size (mm ²)	Max. Cable Size (mm ²)	A (mm)	C (mm)	E (mm)	G (mm)	
DEL2101	S7	PG-7	3.5	6.5	12.5 / 1.27	14	5	13	Temp. Range: -40°C to 120°C Rating: IP 55 Standards: NFC 68312
DEL2102	S9	PG-9	6.5	9	15.2 / 1.41	17	5	16	
DEL2103	S11	PG-11	9	11	18.6 / 1.41	20	6	19	
DEL2104	S13	PG-13	11	13	20.4 / 1.41	22	6	20	
DEL2105	S16	PG-16	13	15	22.5 / 1.41	24	6	22	
DEL2106	S21	PG-21	15	19.5	28.3 / 1.58	30	7	28	
DEL2107	S29	PG-29	19	25	37 / 1.58	39	8	37	
DEL2108	S36	PG-36	25	32	47 / 1.58	49	8	47	
DEL2109	S42	PG-42	32	39	54 / 1.58	56	10	54	
DEL2110	S48	PG-48	38.5	44	60 / 2.30	62	10	60	