
THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP. AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

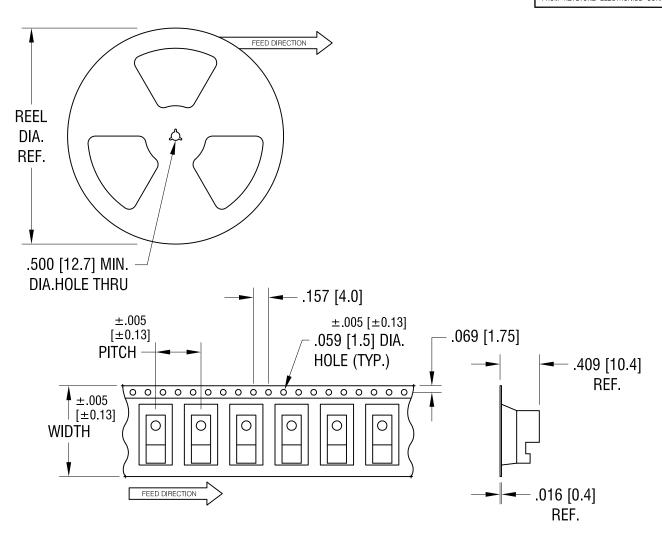

## NOTES:


TAPE AND REEL SPECIFICATIONS:

1 TAPE:

MAT'L - ALL CONDUCTIVE POLYSTYRENE CARRIER ANSI/EIA-481 STANDARD .945 [24.0] WIDE; .472 [12.0] PITCH


2 REEL:

	13.0 [330.2] DIA. 400 PIECES OF PART NO. 5230 PER REEL.						
			KEYSTONE EL I www.keyelco.com • ASTORIA, PART NAME				
			SM BATTERY CONTACT, ON TAPE				
			MATERIAL AS 1	NOTE	OTED		
8.6.07	CHANGE AS PER ECN 07-045	В	FINISH AS NOTED	DRN BY	BOONE LN	DATE 2.9.01	
11.1.05	CHANGE AS PER ECN 05-077	Α	TOLERANCES INCH [MM] COD	E DWG 1		X	
DATE	DESCRIPTION	REV.	DECIMAL ± .015 [± 0.38 ] ANGULAR ± 1° UNLESS OTHERWISE SPECIFIED		5	5230TR	

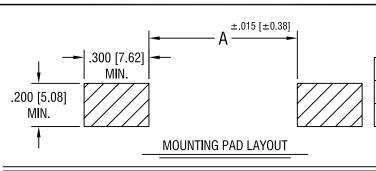

FOR BATTERY SIZE:	'A' DIM.		
AAA	1.959 [49.76]		
AAAA	1.864 [47.35]		

THIS DOCUMENT IS THE PROPERTY OF KEYSTONE ELECTRONICS CORP, AND SHALL NOT BE REPRODUCED, DISTRIBUTED OR USED AS A BASIS FOR MANUFACTURE WITHOUT PRIOR WRITTEN PERMISSION FROM KEYSTONE ELECTRONICS CORP.

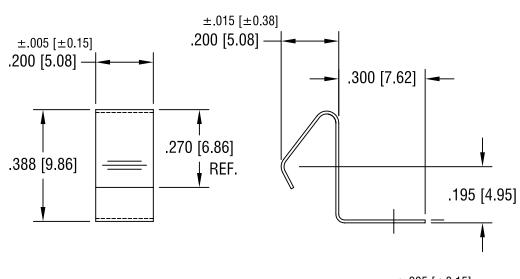

±.005 [±0.15] -.098 [2.49] DIA. HOLE ±.015 [±0.38] -.109 [2.77]

## NOTE:

1. HEAT TREAT TO SPRING TEMPER.

