



TERMINATION PRODUCTS

- 2-1 Compression Lugs
- 2-2 Compression Lugs
- 2-3 Crimping Tools - Compression Lugs
- 2-4 Ferrules - Insulated (Bootlace Ferrules)
- 2-5 Ferrules - Non - Insulated / Splice Connectors
- 2-6 Ferrules - Crimping Tools
- 2-7 Fuses - Glass
- 2-8 Pre-Insulated Terminals – Blade, Pin, & Bullet
- 2-9 Pre-Insulated Terminals – Butt, Closed End.
Crimp Tools
- 2-10 Pre-Insulated Terminals – Q.C. Tabs
Non-Insulated Brass – Q.C. Tabs
- 2-11 Pre-Insulated Terminals – Spade & Ring
Non-Insulated – Ring
- 2-12 Terminal Blocks
- 2-13 IEC Connectors
- 2-14 NEMA Receptacles

TERMINATION PRODUCTS

COMPRESSION LUGS



Part No	Cable Size	Screw Size	Dimensions (mm)				
	mm ²	Ø mm	D1	D2	D3	D4	L
31001	1.5	5	3.3	1.8	7	5.3	19.9
31002	1.5	6	3.3	1.8	9	6.3	22.0
31004	2.5	5	4.3	2.3	8	5.3	19.9
31005	2.5	6	4.3	2.3	9.5	6.3	22.0
31006	4	5	5.0	3.0	10	5.3	26.2
31007	4	6	5.0	3.0	10	6.4	26.2
31008	4	8	5.0	3.0	13	8.4	28.7
31010	6	6	6.0	4.0	12	6.4	27.3
31011	6	8	6.0	4.0	14	8.4	30.5
31013	10	6	6.5	4.5	13	6.4	31.0
31014	10	8	6.5	4.5	13	8.4	31.0
31015	10	10	6.5	4.5	15	10.5	31.0
31016	16	5	8.0	6.0	14	5.3	33.5
31017	16	6	8.0	6.0	14	6.4	33.5
31018	16	8	8.0	6.0	14	8.4	33.5
31019	16	10	8.0	6.0	22	10.5	38.0
31021	25	6	9.0	7.0	16	6.4	39.0
31022	25	8	9.0	7.0	16	8.4	39.0
31023	25	10	9.0	7.0	16	10.5	39.0
31025	35	6	10.9	8.4	17	6.4	43.0
31026	35	8	10.9	8.4	17	8.4	43.0
31027	35	10	10.9	8.4	17	10.5	43.0
31028	35	12	10.9	8.4	20	13.2	46.0
31030	50	8	12.0	9.0	20	8.4	53.0
31031	50	10	12.0	9.0	20	10.5	53.0
31032	50	12	12.0	9.0	21	13.2	53.0



TERMINATION PRODUCTS


COMPRESSION LUGS

Part No	Cable Size	Screw Size	Dimensions (mm)				
	mm ²	Ø mm	D1	D2	D3	D4	L
31035	70	8	14.0	11.2	22	8.4	56.0
31036	70	10	14.0	11.2	22	10.5	56.0
31037	70	12	14.0	11.2	22	13.2	56.0
31040	95	8	17.0	13.4	24	8.4	62.0
31041	95	10	17.0	13.4	24	10.5	62.0
31042	95	12	17.0	13.4	24	13.2	62.0
31044	95	16	17.0	13.4	27	17.0	66.0
31046	120	10	19.5	15.0	27	10.5	69.0
31047	120	12	19.5	15.0	27	13.2	69.0
31049	120	16	19.5	15.0	27	17.0	69.0
31051	150	12	21.0	16.5	31	13.2	75.0
31053	150	16	21.0	16.5	31	17.0	75.0
31054	150	20	21.0	16.5	31	21.0	87.0
31056	185	16	23.5	18.5	33	17.0	87.0
31057	185	20	23.5	18.5	33	21.0	93.0
31060	240	16	26.0	21.0	37	17.0	89.0
31062	300	16	28.5	23.5	46	17.0	108.0
31063	300	20	28.5	23.5	46	21.0	108.0



TERMINATION PRODUCTS

CRIMPING TOOLS





23037

Suits 0.5 - 16.00 mm²



23038

Suits 10.00 - 95.00 mm²

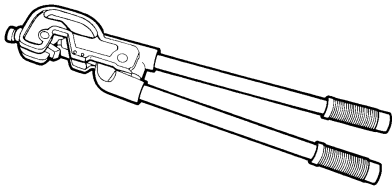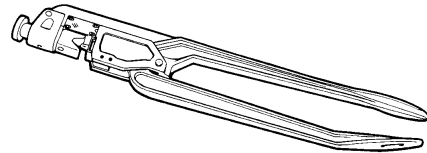

23040



Suits 10.00 - 95.00 mm²

23041

Suits 10.00 - 50.00 mm²

23039

Suits 35.00 - 120.00 mm²

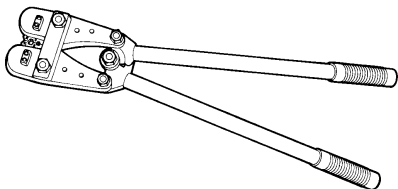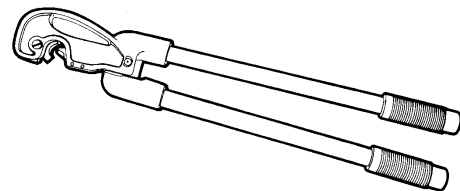

23042

Suits 10.00 - 120.00 mm²




TERMINATION PRODUCTS

INSULATED FERRULES

Single Wire				
Cable Size (mm ²)	Part No	Colour	Part No	Colour
0.50	30350	White	30370	Orange
0.75	30351	Blue	30371	White
1.00	30352	Red	30372	Yellow
1.50	30353	Black	30373	Red
2.50	30354	Grey	30374	Blue
4.00	30355	Orange	30375	Grey
6.00	30356	Green	30376	Black
10.00	30357	Brown	30377	Ivory
16.00	30358	Ivory	30378	Green
25.00	30359	Black	30379	Brown
35.00	30360	Red	30380	Beige
50.00	30361	Blue	30381	Olive

Twin Wire			
Cable Size (mm ²)	Part No	Colour	L2 (mm)
2 x 0.50	30288	White	8.00
2 x 0.75	30289	Blue	8.00
2 x 0.75	30290	Blue	10.00
2 x 1.00	30291	Red	8.00
2 x 1.00	30292	Red	10.00
2 x 1.50	30293	Black	8.00
2 x 1.50	30294	Black	12.00
2 x 2.50	30295	Grey	10.00
2 x 2.50	30296	Grey	13.00
2 x 4.00	30297	Orange	12.00
2 x 6.00	30298	Green	14.00
2 x 10.00	30299	Brown	14.00
2 x 16.00	30300	Ivory	14.00

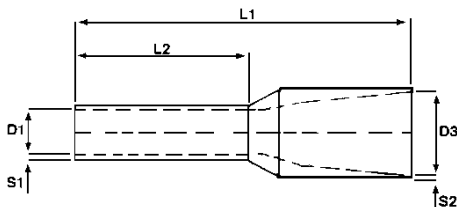


Dimensions							
mm ²	AWG	L1	L2	D1	S1	D3	S2
0.50	20	14.0	8.0	1.0	0.15	2.6	0.25
0.75	18	14.6	8.2	1.2	0.15	2.8	0.25
1.00	17	14.6	8.2	1.4	0.15	3.0	0.25
1.50	16	14.6	8.2	1.7	0.15	3.5	0.25
2.50	14	15.2	8.2	2.2	0.15	4.0	0.25
4.00	12	16.5	9.0	2.8	0.20	4.4	0.30
6.00	10	20.0	12.0	3.5	0.20	6.3	0.30
10.00	7	21.5	12.0	4.5	0.20	7.6	0.40
16.00	6	22.2	12.0	5.8	0.20	8.8	0.40
25.00	3	29.0	16.0	7.3	0.20	11.2	0.40
35.00	2	30.0	16.2	8.3	0.20	12.5	0.50
50.00	1	36.0	19.0	10.3	0.30	15.0	0.60

FERRULE ASSORTMENTS

Supplied in a Clear "Dispenser" Box

			0.50 mm ² to 2.50 mm ²		
Part No			30390	30391	
Contents	50	x 0.50	White	Orange	
	100	x 0.75	Blue	White	
	100	x 1.00	Red	Yellow	
	100	x 1.50	Black	Red	
	50	x 2.50	Grey	Blue	
			4.00 mm ² to 16.00 mm ²		
Part No			30392	30393	
Contents	50	x 4.00	Orange	Grey	
	20	x 6.00	Green	Black	
	20	x 10.00	Brown	Ivory	
	10	x 16.00	Ivory	Green	

TERMINATION PRODUCTS




NON-INSULATED FERRULES

Part No	Cable Size		Dimensions (mm)				
	(mm ²)	AWG	L1	L2	D1	D2	S
30301	0.25	24	5	4.6	0.8	2.0	0.15
30302	0.50	20	6	5.3	1	2.1	0.15
30303	0.50	20	10	9.3	1	2.1	0.15
30304	0.75	18	6	5.3	1.2	2.3	0.15
30305	0.75	18	10	9.3	1.2	2.3	0.15
30306	1.00	17	6	5.3	1.4	2.5	0.15
30307	1.00	17	10	9.3	1.4	2.5	0.15
30308	1.50	16	7	6	1.7	2.8	0.15
30309	1.50	16	10	9	1.7	2.8	0.15
30310	2.50	14	7	9	2.2	3.4	0.15
30311	2.50	14	10	9	2.2	3.4	0.15
30312	4.00	12	9	8	2.8	4	0.20
30313	4.00	12	12	11	2.8	4	0.20
30314	6.00	10	12	11	3.5	4.7	0.20
30315	6.00	10	15	14	3.5	4.7	0.20
30316	10.00	7	12	10.8	4.5	5.8	0.20
30317	10.00	7	15	13.8	4.5	5.8	0.20
30318	10.00	7	18	16.8	4.5	5.8	0.20
30319	16.00	6	12	10.5	5.8	7.5	0.20
30320	16.00	6	15	13.5	5.8	7.5	0.20
30321	16.00	6	18	16.5	5.8	7.5	0.20
30322	25.00	3	15	13	7.3	9.5	0.20
30323	25.00	3	18	16	7.3	9.5	0.20
30324	35.00	2	18	16	8.3	11	0.20
30325	50.00	1	25	22	10.3	13	0.30

SPLICE CONNECTORS



Part No	Colour	Cable size range	
		mm ²	AWG
30486	Red	0.25 – 1.0	22 – 16
30487	Blue	1.0 – 2.5	16 – 14
30488	Yellow	4 – 6	12 – 10

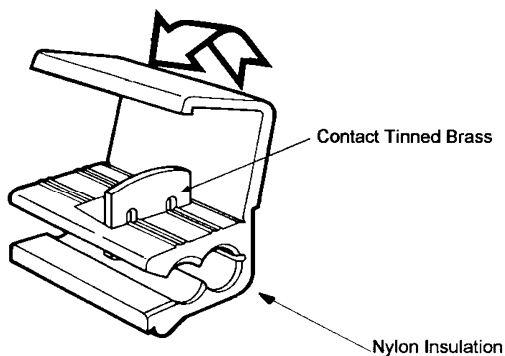

TERMINATION PRODUCTS



CRIMPING TOOLS

P/N 23033
Suits Ferrules: 0.5 - 2.5mm²

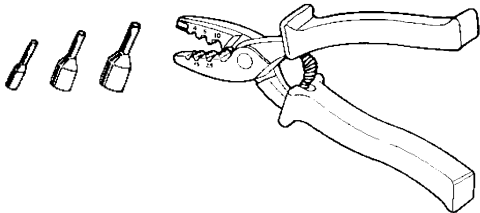


P/N 23034
Suits Ferrules: 0.75 - 10.00mm²

P/N 23035
Suits Ferrules: 6.00 - 16.00mm²



P/N 23036
Suits Ferrules: 0.5 - 6.00mm²

TERMINATION PRODUCTS



GLASS FUSES


Part No	Rating		Dimensions (mm)		
	Amp	Volt	Length	Diameter	Type
36050	100mA	250V	20	5	M205
36051	250mA	250V	20	5	M205
36052	500mA	250V	20	5	M205
36053	1A	250V	20	5	M205
36054	1.6A	250V	20	5	M205
36055	2A	250V	20	5	M205
36056	3.15A	250V	20	5	M205
36057	5A	250V	20	5	M205
36058	6.3A	250V	20	5	M205
36059	10A	250V	20	5	M205
We also supply PCB and surface mount fuse clips & holders – see our Keystone catalogue for details.					
36075	100mA	250V	20	5	M205 Certified
36076	250mA	250V	20	5	M205 Certified
36077	500mA	250V	20	5	M205 Certified
36078	1A	250V	20	5	M205 Certified
36079	1.6A	250V	20	5	M205 Certified
36080	2A	250V	20	5	M205 Certified
36081	3.15A	250V	20	5	M205 Certified
36082	5A	250V	20	5	M205 Certified
36083	6.3A	250V	20	5	M205 Certified
36084	10A	250V	20	5	M205 Certified
We also supply PCB and surface mount fuse clips & holders – see our Keystone catalogue for details.					
36101	100mA	250V	31.8	6.3	3AG
36102	250mA	250V	31.8	6.3	3AG
36103	500mA	250V	31.8	6.3	3AG
36104	1A	250V	31.8	6.3	3AG
36105	1.5A	250V	31.8	6.3	3AG
36106	2A	250V	31.8	6.3	3AG
36107	3A	250V	31.8	6.3	3AG
36108	5A	250V	31.8	6.3	3AG
36109	6A	250V	31.8	6.3	3AG
36110	10A	250V	31.8	6.3	3AG
We also supply PCB and surface mount fuse clips & holders – see our Keystone catalogue for details.					
36130	100mA	250V	31.8	6.3	3AG Certified
36131	250mA	250V	31.8	6.3	3AG Certified
36132	500mA	250V	31.8	6.3	3AG Certified
36133	1A	250V	31.8	6.3	3AG Certified
36134	1.5A	250V	31.8	6.3	3AG Certified
36135	2A	250V	31.8	6.3	3AG Certified
36136	3A	250V	31.8	6.3	3AG Certified
36137	5A	250V	31.8	6.3	3AG Certified
36138	6A	250V	31.8	6.3	3AG Certified
36139	10A	250V	31.8	6.3	3AG Certified

TERMINATION PRODUCTS

BLADE TERMINALS

Flat


Part No	Cable Size		Blade		Insulation
	(mm ²)	AWG	Width	Length	Colour
DBL-GRIP 30659	0.5 – 1.5	22 – 16	3	10	Red
30660	1.5 – 2.5	16 - 14	2.8	9	Blue
30661	4.0 – 6.0	12 – 10	2.8	10	Yellow



Flat With Lip

30662	0.5 – 1.5	22 – 16	3	26	Red
30663	0.5 – 1.5	22 – 16	4.6	17	Red
30664	1.5 – 2.5	16 - 14	3	26	Blue
30665	1.5 – 2.5	16 – 14	4.6	17	Blue
30666	4.0 – 6.0	12 – 10	3	29	Yellow

PIN TERMINALS




Part No		Cable Size		Insulation
PRE-INS	DBL-GRIP	(mm ²)	AWG	Colour
30479	30679	0.5 – 1.5	22 – 16	Red
30480	30680	1.5 – 2.5	16 - 14	Blue
30481	30681	4.0 – 6.0	12 – 10	Yellow

BULLET CONNECTORS


Male

Part No		Cable Size		Size	Insulation
PRE-INS	DBL-GRIP	(mm ²)	AWG	mm	Colour
-	30668	0.5 – 1.5	22 – 16	4	Red
-	30669	1.5 – 2.5	16 - 14	5	Blue
30470	30670	1.5 – 2.5	16 - 14	4	Blue
-	30671	4.0 – 6.0	12 – 10	5	Yellow



Female


-	30672	0.5 – 1.5	22 – 16	4	Red
-	30673	1.5 – 2.5	16 - 14	5	Blue
30474	30674	1.5 – 2.5	16 - 14	4	Blue
-	30675	4.0 – 6.0	12 – 10	5	Yellow




TERMINATION PRODUCTS

BUTT CONNECTORS

Part No		Cable Size		Insulation
PRE-INS	NON-INS	(mm ²)	AWG	Colour
30476	30576	0.5 – 1.5	22 – 16	Red
30477	30577	1.5 – 2.5	16 - 14	Blue
30478	30578	4.0 – 6.0	12 – 10	Yellow



CLOSED END CONNECTORS




Part No	Cable Size		Insulation
	(mm ²)	AWG	Colour
30482	0.25 – 1.5	22 – 16	Natural
30483	1.5 – 2.5	16 - 14	Natural
30484	4.0 – 6.0	12 – 10	Natural
30485	8.0	8	Natural

U CONNECTOR

Part No	Cable Size		Insulation
	(mm ²)	AWG	Colour
30684	1.52	19 – 24	Clear



CRIMP TOOLS

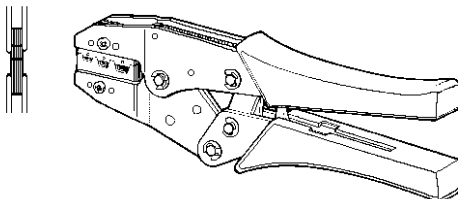

23001




Suits Cables 0.5 - 6.00 mm²

23002



Suits Cables 0.5 - 6.00 mm²

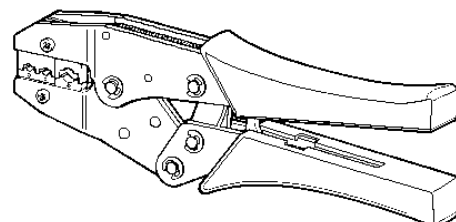


TERMINATION PRODUCTS

FULLY INSULATED QC TABS


Female

Part No		Cable Size		Tab Size	Insulation
PRE-INS	DBL-GRIP	(mm ²)	AWG	mm	Colour
30408	30608	0.5 – 1.5	22 – 16	2.8	Red
30409	30609	0.5 – 1.5	22 – 16	4.8	Red
30410	30610	0.5 – 1.5	22 – 16	6.3	Red
-	30611	1.5 – 2.5	16 – 14	2.8	Blue
-	30612	1.5 – 2.5	16 – 14	4.8	Blue
30413	30613	1.5 – 2.5	16 – 14	6.3	Blue
30414	30614	4.0 – 6.0	12 – 10	6.3	Yellow



Male


30489	-	0.5 – 1.5	22 – 16	6.3	Red
30490	-	1.5 – 2.5	16 – 14	6.3	Blue
30491	-	4.0 – 6.0	12 – 10	6.3	Yellow



PRE-INS QC TABS


Female

Part No		Cable Size		Tab Size	Insulation
PRE-INS	DBL-GRIP	(mm ²)	AWG	mm	Colour
30401	30601	0.5 – 1.5	22 – 16	2.8	Red
30402	30602	0.5 – 1.5	22 – 16	4.8	Red
30403	30603	0.5 – 1.5	22 – 16	6.3	Red
-	30604	1.5 – 2.5	16 – 14	2.8	Blue
30405	30605	1.5 – 2.5	16 – 14	4.8	Blue
30406	30606	1.5 – 2.5	16 – 14	6.3	Blue
30407	30607	4.0 – 6.0	12 – 10	6.3	Yellow




Male

30418	30618	0.5 – 1.5	22 – 16	6.3	Red
30419	30619	1.5 – 2.5	16 – 14	6.3	Blue
30420	30620	4.0 – 6.0	12 – 10	6.3	Yellow




Piggy Back

30415	30615	0.5 – 1.5	22 – 16	6.3	Red
30416	30616	1.5 – 2.5	16 – 14	6.3	Blue
30417	30617	4.0 – 6.0	12 – 10	6.3	Yellow



Quick Connect Brass Terminals

Part No	Cable Size		Tab Size
30588	0.5 – 2.5	22-14	2.8
30589	0.5 – 2.5	22-14	4.8
30590	0.5 – 2.5	22-14	6.3




Part No	Cable Size		Tab Size
30586	0.5 – 2.5	22-14	2.5
30587	0.5 – 2.5	22-14	6.3


TERMINATION PRODUCTS

SPADE TERMINALS

Part No			Cable Size		Screw size		Insulation
NON-INS	PRE-INS	DBL-GRIP	(mm ²)	AWG	mm	Imp.	Colour
30521	30421	30621	0.5 – 1.5	22 – 16	3.5	#6	Red
30522	30422	30622	0.5 – 1.5	22 – 16	4.0	#8	Red
30523	30423	30623	0.5 – 1.5	22 – 16	5.0	#10	Red
30524	30424	30624	0.5 – 1.5	22 – 16	6.0	.250"	Red
30525	30425	30625	1.5 – 2.5	16 - 14	3.5	#6	Blue
30526	30426	30626	1.5 – 2.5	16 – 14	4.0	#8	Blue
30527	30427	30627	1.5 – 2.5	16 - 14	5.0	#10	Blue
30528	30428	30628	1.5 – 2.5	16 – 14	6.0	.250"	Blue
30529	-	30629	4.0 – 6.0	12 – 10	3.5	#6	Yellow
30530	-	30630	4.0 – 6.0	12 – 10	4.0	#8	Yellow
30531	-	30631	4.0 – 6.0	12 – 10	5.0	#10	Yellow
30532	30432	30632	4.0 – 6.0	12 – 10	6.0	.250"	Yellow



RING TERMINALS



Part No			Cable Size		Screw size		Insulation
NON-INS	PRE-INS	DBL-GRIP	(mm ²)	AWG	mm	Imp.	Colour
30533	30433	30633	0.5 – 1.5	22 – 16	3.5	#6	Red
30534	30434	30634	0.5 – 1.5	22 – 16	4.0	#8	Red
30535	30435	30635	0.5 – 1.5	22 – 16	5.0	#10	Red
30536	30436	30636	0.5 – 1.5	22 – 16	6.0	.250"	Red
30537	30437	30637	0.5 – 1.5	22 – 16	8.0	.312"	Red
30538	-	30638	0.5 – 1.5	22 – 16	10.0	.375"	Red
30539	30439	30639	1.5 – 2.5	16 - 14	3.5	#6	Blue
30540	30440	30640	1.5 – 2.5	16 – 14	4.0	#8	Blue
30541	30441	30641	1.5 – 2.5	16 - 14	5.0	#10	Blue
30542	30442	30642	1.5 – 2.5	16 – 14	6.0	.250"	Blue
30543	30443	30643	1.5 – 2.5	16 – 14	8.0	.312"	Blue
30544	-	30644	1.5 – 2.5	16 - 14	10.0	.375"	Blue
30545	-	30645	1.5 – 2.5	16 – 14	13.0	.500"	Blue
30549	-	30649	4.0 – 6.0	12 – 10	3.5	#6	Yellow
30550	-	30650	4.0 – 6.0	12 – 10	4.0	#8	Yellow
30551	-	30651	4.0 – 6.0	12 – 10	5.0	#10	Yellow
30552	30452	30652	4.0 – 6.0	12 – 10	6.0	.250"	Yellow
30553	30453	30653	4.0 – 6.0	12 – 10	8.0	.312"	Yellow
30554	30454	30654	4.0 – 6.0	12 – 10	10.0	.375"	Yellow
30555	30455	30655	4.0 – 6.0	12 – 10	13.0	.500"	Yellow

TERMINATION PRODUCTS

P.C.B. Terminal Blocks

Solder Mount – Modular Interlocks (5.00mm)

Part No	Poles	Cable Size (mm ²)	Voltage Rating	Current Rating	Housing
31602	2	0.25 – 2.5	250V	12A	Green
31603	3	0.25 – 2.5	250V	12A	Green




Pluggable – Modular Interlocks (5.00mm)

Part No	Poles	Cable Size (mm ²)	Voltage Rating	Current Rating	Housing
31632	2	0.25 – 1.5	250V	10A	Blue
31633	3	0.25 – 1.5	250V	10A	Blue
Header Strip					
31624	24	-	250V	10A	Black

Standard Terminal Blocks

Part No	Poles	Cable Size (mm ²)	Voltage Rating	Current Rating	Housing	Wire Protection Flap
31610	12	1.5	450V	15A	Nylon 66	No
31611	12	1.5	450V	15A	Nylon 66	Yes
31612	12	2.5	450V	20A	Nylon 66	No
31613	12	2.5	450V	20A	Nylon 66	Yes
31614	12	6.0	500V	40A	Nylon 66	No
31615	12	6.0	500V	40A	Nylon 66	Yes
31616	12	10.0	500V	50A	Nylon 66	No
31617	12	10.0	500V	50A	Nylon 66	Yes

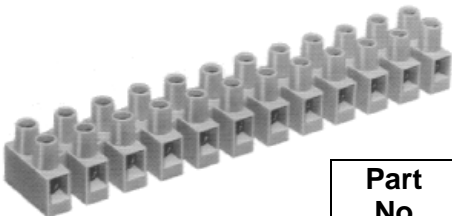

Part No	Poles	Cable Size (mm ²)	Voltage Rating	Current Rating	Wire Protection Flap	Housing
31618	12	1.5	450V	15A	No	Nylon 66
31619	12	1.5	450V	15A	Yes	Nylon 66
31620	12	2.5	450V	20A	No	Nylon 66
31621	12	2.5	450V	20A	Yes	Nylon 66
31625	12	2.5	400V	6A	No	Polyethylene
31626	12	4.0	400V	10A	No	Polyethylene
31627	12	6.0	400V	16A	No	Polyethylene
31628	12	10.0	400V	32A	No	Polyethylene

TERMINATION PRODUCTS

Power Sockets

IEC Panel Mount

Part No	Terminal	Voltage Rating	Current Rating	Mounting Type	Illustration
31676	6.3mm QD Tab	250VAC	10A	Screw	
31677	4.8mm QD Tab / Solder	250VAC	10A	Screw	
31678	2.5mm Solder Tab	250VAC	10A	Screw	
31681	6.3mm QD Tab	250VAC	10A	Push In	
31682	4.8mm QD Tab / Solder	250VAC	10A	Push In	
31683	2.5mm Solder Tab	250VAC	10A	Push In	
31684	6.3mm QD Tab	250VAC	10A	Screw	
31688	4.8mm QD Tab / Solder	250VAC	10A	Screw	
31689	2.5mm Solder Tab	250VAC	10A	Screw	
31691	6.3mm QD Tab W/- Fuseholder	250VAC	10A	Screw	
31687	4.8mm QD Tab / Solder W/- Fuseholder	250VAC	10A	Screw	
31690	2.5mm Solder Tab W/- Fuseholder	250VAC	10A	Screw	
31692	6.3mm QD Tab W/- Fuseholder	250VAC	10A	Push In	
31693	4.8mm QD Tab / Solder W/- Fuseholder	250VAC	10A	Push In	
31694	2.5mm Solder Tab W/- Fuseholder	250VAC	10A	Push In	
31674	4.8mm QD Tab / Solder W/- Fuseholder W/- Power Switch	250VAC	10A	Push In	

Other terminations and styles are available contact sales department for more information.

All types have safety approvals from, UL, CSA, VDE, SEV, DEMKO, NEMKO, SEMKO, FINKO.



All products on this page are RoHS compliant.

Contact sales department for full specification sheets.

TERMINATION PRODUCTS

Power Sockets

NEMA 5-15R US Outlets

Part No	Terminal	Voltage Rating	Current Rating	Mounting Type	Illustration
31679	4.8mm QD Tab / Solder	125VAC	15A	Push In	
31680	V Slotted for AWG 14 Solid Wire	125VAC	15A	Push In	
31675	V Slotted for AWG 12 & 14 Solid Wire – Feed Through	125VAC	13A/15A	Push In	

Other terminations and styles are available contact sales department for more information.

All types have safety approvals from, UL, CSA.

All products on this page are RoHS compliant.

Contact sales department for full specification sheets.